

## DESCRIPTION

The UHF-R® is a professional, wireless technology engineered for the most demanding touring environments and installations.

UHF-R® wireless systems offer unprecedented flexibility and versatility. Using multiple frequency bands, up to 160 compatible systems can be used simultaneously. Individual frequency bands deliver up to 60 compatible systems per band. The UHF-R also includes infrared synchronization that allows you to configure transmitter settings from the receiver. With multiple system operation and interchangeable components, UHF-R systems also offer a choice of Single or Dual Channel Diversity Receivers.

## SYSTEM FEATURES

Shure UHF-R® Wireless Systems offer many exceptional features, including:

### Auto Frequency Selection/Scan

- Locates a clear channel instantly

### Auto Transmitter Sync

- Infrared (IR) sync automatically synchronizes the transmitter and receiver

### Networking

Each receiver has an RJ-45 port on the back that lets you connect to an Ethernet network. Networking receivers provides the following benefits:

- Makes channel setup faster and easier
- Allows you to monitor and control multiple receivers using the Shure Wireless Workbench PC Software

### RF Distribution Ports

Use the RF distribution ports to share the signal from a single pair of antennas with up to 10 single or dual receivers within the same frequency band. The RF ports eliminate the need for antenna splitters or distribution amplifiers. Active circuitry minimizes insertion losses, preserving signal quality. Input filtering keeps the signal free from out-of-band interference. Distribution circuitry is active only when additional receivers are connected to the RF distribution ports. When not used, the port circuitry is bypassed, allowing the receiver to be used as a stand-alone component.

### Shure's Wireless Workbench Software

Key benefits of current Wireless Workbench software include:

- Fast network setup of large groups of wireless systems:
- Scans current RF environment.
- Plots RF history, using an individual transmitter to identify potential areas of weak signals and dropouts.
- Remote monitoring and control of multiple wireless systems.
- Wireless Workbench provides faster setup and more complete control.
- Automatic Frequency Selection Wizard: Will scan and select open frequencies, applying them to all Shure UHF-R receivers in network (and ultimately to connected networks of current UHF series receivers as well).
- Comprehensive Infra-Red (IR) Auto Sync/Automatic Transmitter Setup: PC control of transmitter sync with corresponding receiver. Syncs frequency, lockouts, power setting, custom groups.
- Frequency Compatibility Calculator Wizard: By scanning the RF environment and then considering all networked hardware models, Wireless Workbench recommends frequencies for all specified wireless systems (including PSM systems, and competitive product). While this feature has a proprietary slant, a generic hardware "template" will be available for those users who insist on networking with non-Shure products)
- The Band Limiting feature allows manufacturer or service center to set Network frequency band parameters, to align with any country/regional RF usage guidelines that might conflict with the available bandwidth.
- Custom Frequency Group Creation allows customization of frequency groups to be used in specific locations. May require advanced wireless aptitude, or assistance from Shure's Applications departments.

### Shure's patented Audio Reference Companding

- Delivers a crystal clear audio transmission, superior to conventional wireless technology

### UR4S+ & UR4D+ DIVERSITY RECEIVER FEATURES:

- Up to 2,400 selectable frequencies across up to 60 MHz bandwidth
- Track Tuning** Filtering Technology (on all 60 MHz or greater products).
- Up to 40 preset compatible systems/band (up to 160 with multiple bands).
- Network Automatic Frequency Selection
- Automatic Transmitter sync (**including custom Group Upload**)
- Flash memory to store six 60-channel custom frequency groups
- Shure's Patented Audio Reference Companding
- Multi-function bit-mapped backlit LCD
- Built-in **USB & Ethernet** network Control/Monitoring
- AMX/Creston Compatible
- Remoteable 1/2 wave antenna
- Temperature-activated fan ensures top performance in high temperature environments. Clean fan screen as needed to remove dust.
- MARCAD® diversity

### HANDHELD AND BODYPACK TRANSMITTERS FEATURES

- Switchable RF Power (10/50 & 10/100 mW), country dependent
- Low profile, compact bodypack design
- Frequency and Power Lockout
- Bit-mapped Backlit LCD
- 2 AA Batteries - Up to 9.5 hours continuous use (low power)
- Automatic Transmitter Setup
- All-metal die-cast construction
- Light-weight magnesium bodypack
- Flexible bodypack antenna
- Reversible Belt Clip

## UHF-R™ Wireless System Specifications

### Frequency Range and Transmitter Output Power

| Band        | Range                 | Transmitter power (Nominal mW) |          |
|-------------|-----------------------|--------------------------------|----------|
|             |                       | Handheld                       | Bodypack |
| <b>G1</b>   | 470-530 MHz           | 10 / 50                        | 10 / 100 |
| <b>G1E</b>  | 470-530 MHz           | 10 / 50                        | 10 / 50  |
| <b>H4</b>   | 518-578 MHz           | 10 / 50                        | 10 / 100 |
| <b>H4E</b>  | 518-578 MHz           | 10 / 50                        | 10 / 50  |
| <b>J5</b>   | 578-608, 614-638      | 10 / 50                        | 10 / 100 |
| <b>J5E</b>  | 578-638 MHz           | 10 / 50                        | 10 / 50  |
| <b>K4E</b>  | 606-666               | 10 / 50                        | 10 / 50  |
| <b>L3</b>   | 638-698 MHz           | 10 / 50                        | 10 / 100 |
| <b>L3E</b>  | 638-698 MHz           | 10 / 50                        | 10 / 50  |
| <b>M5E</b>  | 694-758 MHz           | 10 / 50                        | 10 / 50  |
| <b>P8</b>   | 710-790 MHz           | 10 / 50                        | 10 / 50  |
| <b>P9</b>   | 710-787 MHz           | 10 / 50                        | 10 / 50  |
| <b>Q5</b>   | 740-814 MHz           | 10 / 50                        | 10 / 50  |
| <b>R9</b>   | 790-865 MHz           | 10 / 50                        | 10 / 50  |
| <b>Q6</b>   | 740-752 MHz           | 10                             | 10       |
| <b>A24</b>  | 779-788 / 797-806 MHz | 10                             | 10       |
| <b>JBX</b>  | 806-810 MHz           | 10                             | 10       |
| <b>Q10A</b> | 740-798 MHz           | 10 / 50                        | 10 / 50  |
| <b>R16</b>  | 794-806 MHz           | 10/50                          | 10/50    |
| <b>R18</b>  | 794-806 MHz           | 10 Only                        | 10 Only  |
| <b>X1</b>   | 944-952 MHz           | 10/50                          | 10/100   |

### NOTE

This Radio equipment is intended for use in musical professional entertainment and similar applications.

This Radio apparatus may be capable of operating on some frequencies not authorized in your region. Please contact your national authority to obtain information on authorized frequencies and RF power levels for wireless microphone products.

**RF Carrier Frequency Range**  
470-952 MHz, depending on region

**Working Range**  
UR1, UR2: 150 m (500 ft.), under typical conditions  
500 m (1600 ft) **line-of-sight, outdoors** for a single system

**NOTE:** Actual working range depends on RF signal absorption, reflection and interference

**Audio Frequency Response**  
40 – 18,000 Hz, (+1 dB, –3 dB).

**NOTE:** Overall system frequency response depends on microphone element

**Gain Adjustment Range**  
UR1: –20 to +35 dB  
UR2: –10 to +20 dB

**Modulation**  
FM (45 kHz max. deviation), compander system with pre- and de-emphasis

**RF Power Output**  
See table above.

**Dynamic Range**  
>105 dB, A-weighted

**Image Rejection**  
>110 dB typical

**RF Sensitivity**

| UR4S+                           | UR4D+                           |
|---------------------------------|---------------------------------|
| –110 dBm Typical<br>12 dB SINAD | –107 dBm Typical<br>12 dB SINAD |
| –105 dBm Typical<br>30 dB SINAD | –102 dBm Typical<br>30 dB SINAD |

**Spurious Rejection**  
>90 dB typical

**Ultimate Quieting (ref. 45 kHz deviation)**  
>100 dB, A-weighted

**Signal Polarity**  
Positive pressure on microphone diaphragm (or positive voltage applied to tip of WA302 phone plug) produces positive voltage on XLR output pin 2 with respect to XLR pin 3 and on the tip of the 1/4-inch output jack.

**System Distortion (ref.  $\pm 45$  kHz deviation, 1 kHz modulation)**  
<0.3% Total Harmonic Distortion typical

**Power Requirements**  
UR1, UR2: Two 1.5V AA batteries  
UR4: 100 to 240 Vac, 50/60 Hz

**Current Drain**  
UR1, UR2: 180 mA max. (normal RF power setting)  
240 mA max. (high RF power setting)  
UR4D+, UR4S+: 0.8 Amps max.

**Battery Life (Typical)**  
UR1, UR2: 9.5 hours (low power)  
6 hours (high power)

**Operating Temperature Range**  
–18° to +57° C (0° to +135° F)

**NOTE:** Battery characteristics may limit this range

**NOTE:** Electrical safety approval is based on a maximum ambient temperature of 35°C (95°F).

**Overall Dimensions**  
UR1: 98 mm L x 60 mm W x 17 mm D (3.84 x 2.38 x 0.66 in.)  
UR2/SM58: 261 mm L x 51 mm Dia. (10.27 x 2 in.)  
UR2/SM86: 261 mm L x 51 mm Dia. (10.27 x 2 in.)  
UR2/SM87A: 254 mm x 51 mm Dia. (10 x 2 in.)  
UR2/BETA 58: 258 mm L x 51 mm Dia. (10.15 x 2 in.)  
UR2/BETA 87A, UR2/BETA 87C: 254 mm x 51 mm Dia. (10 x 2 in.)  
UR2/KSM9/BK, UR2/KSM9/SL: 250 mm x 49 mm Dia. (9 7/8 x 15/16 in.)  
UR4S+/UR4D+: 44 mm H x 483 mm W x 366 mm D (1.72 x 19.00 x 14.39 in.)

**Net Weight**  
UR1: 97 g (3.4 oz.) without battery  
UR2/SM58: 356 g (12.6 oz.) without battery  
UR2/BETA 58: 314 g (11.1 oz.) without battery  
UR2/SM86: 317 g (11.2 oz.) without battery  
UR2/SM87A: 298 g (10.5 oz.) without battery  
UR2/BETA 87A, U2/BETA 87C: 325 g (11.5 oz) without battery  
UR2/KSM9/BK, UR2/KSM9/SL: 410 g (14.4 oz.) without battery  
UR4S+: 4.8 kg (10.6 lbs)  
UR4D+: 5.0 kg (11.0 lbs)

**Housing:**  
UR1: Cast magnesium  
UR2: Aluminum die-cast handle and aluminum machined battery cup  
UR4S+, UR4D+: Galvanized steel

## CERTIFICATION

### UR1, UR2, UR4S+, UR4D+

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

Meets requirements of EMC standards EN 300 422 Parts 1 and 2 and EN 301 489 Parts 1 and 9.

Meets essential requirements of European R&TTE Directive 99/5/EC, eligible to bear the CE mark.  0682 

### UR1, UR2

Certified under FCC Part 74. (FCC ID: DD4UR1, DD4UR2). Certified by IC in Canada under RSS-123 and RSS-102. (IC: 616A-UR1, 616A-UR2, 616A-UR1G1, 616A-UR2G1).

Emission Designator: 120KF3E

### UR4S+, UR4D+

Approved under the Declaration of Conformity (DoC) provision of FCC Part 15.

Certified in Canada by IC to RSS-123. (IC: 616A-UR4P). Conforms to Australian EMC requirements and is eligible for C-Tick marking.

Have been granted the following Country Safety Approvals:

cULus Mark for US and Canada: Meets UL6500 and CSA/CAN E60065. UL GS-Certified to EN60065.


Operation of this device is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any inter-ference, including interference that may cause undesired operation of the device.

The CE Declaration of Conformity can be obtained from Shure Incorporated or any of its European representatives. For contact information please visit [www.shure.com](http://www.shure.com)

The CE Declaration of Conformity can be obtained from:

[www.shure.com/europe/compliance](http://www.shure.com/europe/compliance)

## Wiring

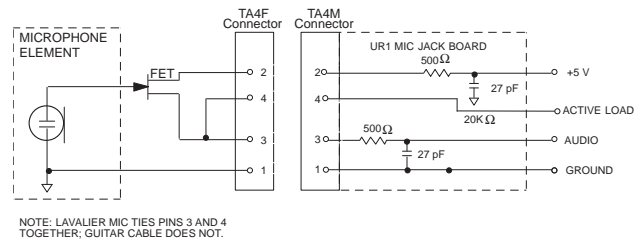

## INPUTS AND OUTPUTS

### UR1 Transmitter Audio Input

|  |  |
|--|--|
| <b>Connector:</b>                            | 4-Pin male mini connector (TA4M)   |
| <b>Input Configuration:</b>                  | Unbalanced, active   |
| <b>Actual Impedance:</b>                     | >1 MΩ  |
| <b>Maximum Input Level:</b><br>1 kHz, 1% THD | +10 dBu (sensitivity 0 dB)<br>+20 dBu (sensitivity –10 dB)   |
| <b>TA4M Connector Pin Assignments:</b>       | Pin 1: Ground<br>Pin 2: +5 Vdc bias<br>Pin 3: Audio<br>Pin 4: Tied through active load (on main board) to Ground.<br>(On instrument adapter cable, Pin 4 floats) |

### UR1 Transmitter RF Output

|                          |                                   |
|--------------------------|-----------------------------------|
| <b>Connector:</b>        | SMA                               |
| <b>Actual Impedance:</b> | 50 Ω                              |
| <b>Pin Assignments:</b>  | Shell = Ground<br>Center = Signal |

### UR2 Transmitter Audio Input

|  |                    |
|--|--------------------|
| <b>Input Configuration:</b>                  | Unbalanced, active |
| <b>Actual Impedance:</b>                     | >1 MΩ              |
| <b>Maximum Input Level:</b><br>1 kHz, 1% THD | +4.8 dBu           |

#### UR2 Transmitter RF Output

|                          |                                   |
|--------------------------|-----------------------------------|
| <b>Connector:</b>        | SMA                               |
| <b>Actual Impedance:</b> | 50 $\Omega$                       |
| <b>Pin Assignments:</b>  | Shell = Ground<br>Center = Signal |

#### Receiver Input

|                             | Antenna                           | Power                    |
|-----------------------------|-----------------------------------|--------------------------|
| <b>Connector Type:</b>      | BNC                               | IEC                      |
| <b>Actual Impedance:</b>    | 50 $\Omega$                       | -                        |
| <b>Nominal Input Level:</b> | -95 to -30 dBm                    | 100-240 VAC, 50/60 Hz    |
| <b>Maximum Input Level:</b> | -20 dBm                           | 240 VAC, + 10%, 50/60 Hz |
| <b>Pin Assignments:</b>     | Shell = Ground<br>Center = Signal | IEC Standard             |
| <b>Bias Voltage*</b>        | 12.2 Vdc @ 150 mA maximum         | N/A                      |

\* For remote antenna amplifiers

#### RF Distribution Ports

|                       | RF IN           | RF OUT |
|-----------------------|-----------------|--------|
| <b>Connector Type</b> | BNC             | BNC    |
| <b>Vdc Bias</b>       | 12 Vdc @ 150 mA | N/A    |

#### Receiver Audio Output


|                                  | Monitor (1/4" Headphone)                | 1/4" Phone                                    | XLR   |
|----------------------------------|---|---|---|
| <b>Output Configuration:</b>     | Unbalanced mono, 1/4 inch               | Impedance Balanced                            | Electrically Balanced                             |
| <b>Actual Impedance:</b>         | 50 $\Omega$                             | 200 $\Omega$                                  | 200 $\Omega$ (active balanced) (150 $\Omega$ mic) |
| <b>Maximum Output Level</b>      | 1 Watt @ 63 $\Omega$                    | +18 dBu                                       | +24 dBu (-6 dBu mic) with 100 Hz modulating tone  |
| <b>Pin Assignments:</b>          | Tip = Hot<br>Ring = Hot<br>Sleeve = Gnd | Tip = Hot<br>Ring = no signal<br>Sleeve = Gnd | 1 = Ground<br>2 = Audio +<br>3 = Audio -          |
| <b>Phantom Power Protection?</b> | No                                      | Yes   | Yes   |

#### Computer/Network Interface


| Ethernet | USB*                    |
|----------|-------------------------|
| RJ45     | USB Series B Receptacle |

\* USB-IF logo is a trademark of Universal Serial Bus Implementers Forum, Inc.


XLR

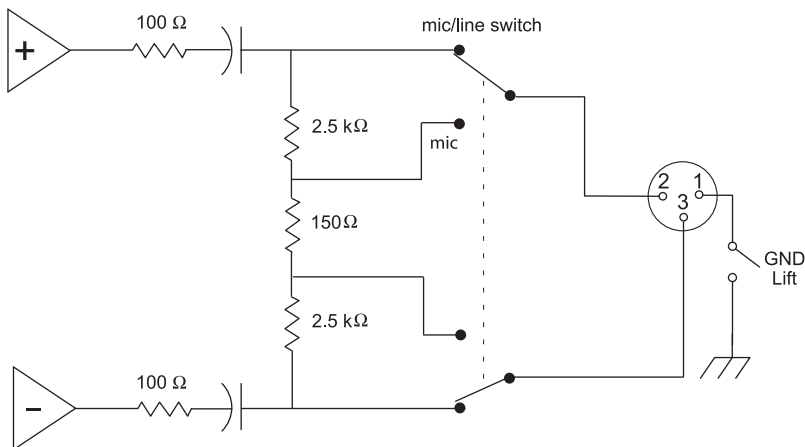

1/4" Monitor/headphone



1/4" Phone

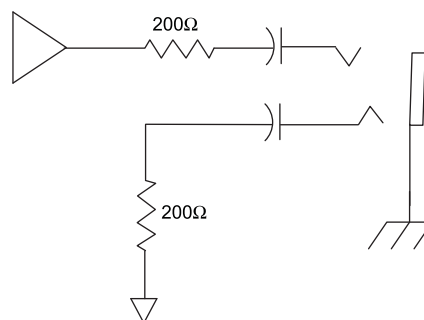

## REPLACEMENT PARTS AND ACCESSORIES

### Furnished Accessories

|  |         |
|--|---------|
| Microphone Stand Adapter (UR2)                 | WA371   |
| Zipper Bag (UR1)                               | 26A13   |
| Zipper Bag (UR2)                               | 26A14   |
| Antenna Extension Cables (2)                   | 95A9023 |
| RF Distribution Cables (2)                     | 95N2035 |
| Hardware Kit, Locking Connector                | WA340   |
| Antenna (UR1), 470-530 MHz                     | UA700   |
| Antenna (UR1), 944-952 MHz                     | UA740   |
| Antenna (UR1), 518-578 MHz                     | UA710   |
| Antenna (UR1), 578-698 MHz                     | UA720   |
| Antenna (UR1), 740-865 MHz                     | UA730   |
| Two Antennas (UR4), Band Dependent (see table) | UA820   |
| Transmitter Carrying Case                      | 95A9053 |

### Optional Accessories

|                                  |         |
|----------------------------------|---------|
| SM58 Head with Grille            | RPW112  |
| SM86 Head with Grille            | RPW114  |
| BETA 58 Head with Grille         | RPW118  |
| BETA 87A Head with Grille        | RPW120  |
| BETA 87C Head with Grille        | RPW122  |
| SM87A Head with Grille           | RPW116  |
| KSM9/SL Head with Grille         | RPW 180 |
| KSM9/BK Head with Grille         | RPW184  |
| Matte Silver Grille (SM58)       | RK143G  |
| Matte Silver Grille (SM86)       | RPM266  |
| Matte Silver Grille (BETA 58)    | RK265G  |
| Black Grille (SM87)              | RK214G  |
| Matte Silver Grille (BETA 87A)   | RK312   |
| Matte Silver Grille (BETA 87C)   | RK312   |
| Black Grille (BETA 58)           | RK323G  |
| Black Grille (BETA 87A/BETA 87C) | RK324G  |
| Belt Clip                        | 44A8031 |
| Body-Pack Pouch (Black), UR1     | WA580B  |
| Body-Pack Pouch (White), UR1     | WA580W  |
| Popper Stopper™ Windscreen       | A85WS   |

### Antenna Combiners and Accessories

- Antennas and receivers must be from the same frequency band.
- The supplied 1/2 wave antennas can be remotely mounted or mounted directly to the UA845.
- Antennas and cables for use with the UA845 can also be used with stand-alone UHF-R receivers.

|   |                       |
|---|-----------------------|
| Passive Antenna/Splitter Combiner Kit (recommended for 2 receivers) | UA221                 |
| UHF Antenna Power Distribution Amplifier                            | UA845-                |
| U.S.A.  | UA845SWB              |
| Europe  | UA845E                |
| UK  | UA845UK               |
| 1/2 Wave, Omnidirectional, Wideband Antenna                         | UA860SWB              |
| Active Directional Wideband Antenna                                 | UA870USTV and UA870X* |
| Wideband In-Line RF Amplifier                                       | UA830USTV and UA830X* |
| Passive Unidirectional Wideband Antenna                             | PA805SWB              |
| 1/2 wave antennas (2)   |                       |
| H4E, H4 Bands   | UA820H4               |
| J5E, J5 Bands   | UA820J                |
| L3E, L3 Bands   | UA820L3               |
| Q5, Q6, Q10 Bands   | UA820Q                |
| R9, ABJ, Bands  | UA820A                |
| G1 Band   | UA820G                |
| X1 Band   | UA820X                |
| 10' Antenna Cable   | PA725                 |
| 25' Antenna Cable (RG-8/X)  | UA825                 |
| 50' Antenna Cable (RG-8/X)  | UA850                 |
| 100' Antenna Cable  | UA8100                |

Note: USTV: 470-698 MHz. X: 944-952 MHz

### Architect's and Engineer's Specifications

The wireless system shall operate in the UHF band between 470-865 MHz and 944-952 MHz, with the specific range being dependent on the user's locale. The system shall include the option of changing the operating frequency in order to avoid RF interference, enabling up to 160 systems to operate simultaneously in the same location. Preconfigured group, channel and frequency setups shall be available to ensure that multiple systems in use do not interfere with one another.

All transmitters shall be powered by 2 AA batteries and shall have a power on/off switch. The bodypack will have an LED indicating that power is on. Available transmitters shall include: a body pack for use with electric guitars, basses, and other electric instruments, and a handheld microphone for vocals. The transmitters shall have a DC/DC converter to ensure consistent performance, even if battery voltages change.

The receiver shall have a user-programmable, menu-driven LCD showing group, channel, frequency, name, squelch level, and locked/unlocked status. The system shall use technology such as MARCAD® signal combining circuitry to improve reception, minimize signal dropouts, and achieve the best possible signal-to-noise ratio. An equalizer, tone key squelch, and noise squelch circuitry shall be built into the system to provide optimal sound quality and minimize unwanted noise. The receiver shall include dual RF meters (one for each antenna), an audio level meter, and a Networking Interface connector for computer control and monitoring. The receiver shall have a volume control and an adjustable noise squelch control.

The system shall be the Shure UHF-R Wireless.

# SHURE®

### United States, Canada, Latin America, Caribbean:

Shure Incorporated  
5800 West Touhy Avenue  
Niles, IL 60714-4608 USA

Phone: 847-600-2000  
Fax: 847-600-1212 (USA)  
Fax: 847-600-6446  
Email: info@shure.com

### Europe, Middle East, Africa:

Shure Europe GmbH  
Jakob-Dieffenbacher-Str. 12,  
75031 Eppingen, Germany

Phone: 49-7262-92490  
Fax: 49-7262-9249114  
Email: info@shure.de

### Asia, Pacific:

Shure Asia Limited  
22/F, 625 King's Road  
North Point, Island East  
Hong Kong

Phone: 852-2893-4290  
Fax: 852-2893-4055  
Email: info@shure.com.hk

www.shure.com

©2011 Shure Incorporated